50T&150T Series Single Pump Ordering Code
50T & 150T系列泵訂購指引

50T
150T



Model 型 號		Delivery Flow (ℓ /min) at no-load pressure 無負壓的傳輸流量 Running Speed (rpm) 轉速 1000	1200	1500	1800	Running Speed (rpm) 轉速 Max 最大	Min 最小	Weight(Kg) 重 量 Foot Type 腳座型	Flange Type 法蘭型	Max Pressure (Kgf/cm^2) 最大壓力
50T	09	—	10.8	13.5	16.2	1800	950	10	9.5	105
	12	12.0	14.4	18.0	21.6	1800	950	10	9.5	105
	14	14.6	17.5	21.7	26.1	1800	950	10	9.5	105
	17	17.0	20.3	25.5	31.5	1800	950	10	9.5	105
	19	19.2	23.0	28.8	34.6	1800	950	10	9.5	105
	21	21.1	25.3	31.7	38.0	1800	950	10	9.5	105
	23	23.0	27.6	34.5	41.4	1800	950	10	9.5	105
	26	26.2	31.4	39.3	47.2	1800	950	10	9.5	105
	30	30.1	36.1	45.2	54.0	1800	950	10	9.5	105
	36	36.2	43.4	54.3	—	1500	950	10	9.5	70
	40	41.5	49.8	—	—	1200	950	10	9.5	70
150T	48	48.3	57.9	72.4	86.9	1800	900	24	24	90
	61	61.5	73.8	92.2	110.7	1800	900	24	24	90
	75	75.2	90.6	113.2	135.9	1500	900	24	24	90
	94	94.2	113.0	141.3	—	1500	900	24	24	70
	116	116.3	139.6	—	—	1200	900	24	24	70
	125	125.3	150.4	—	—	1200	900	24	24	70

ORDERING CODE 訂購指引

50 T - 12 - F - R R - 01
① ② ③ ④ ⑤ ⑥ ⑦

①—— Series Number(型號)
50T-
150T-

②—— Piping Mounting(管口形式)
T: Piping Type(管徑牙口) F: Flange Type(法蘭型)

③—— Capacity Mark: (c.c/rev)(流量)
50T:09,12,14,17,19,21,23,26,30,36,40
150T:48,61,75,94,116,125

④—— Flange Type(安裝方式)
L: Foot Type(腳座型) F: Flange Type(法蘭型)

⑤—— Shaft Rotation(心軸轉向)
(Viewed From Shaft End)
R: Clockwise (順時針) L: Anti-Clockwise(反時針)

⑥—— Discharge Port Position(出口位置)
(Viewed From Shaft End)
R: On Right Hand(右) L:On Left Hand (normal(左)

⑦—— Shaft Type(心軸種類) 01: No.01 Shaft
02: No.02 Shaft

50T (Foot Type)腳座型

	A	B	C	D	E
NO.01-Shaft	Ø19.05	36.0	4.76	21.3	32
NO.02-Shaft	Ø22.0	46.0	5.0	24.0	30.0
NO.04-Shaft	Splined Shaft				

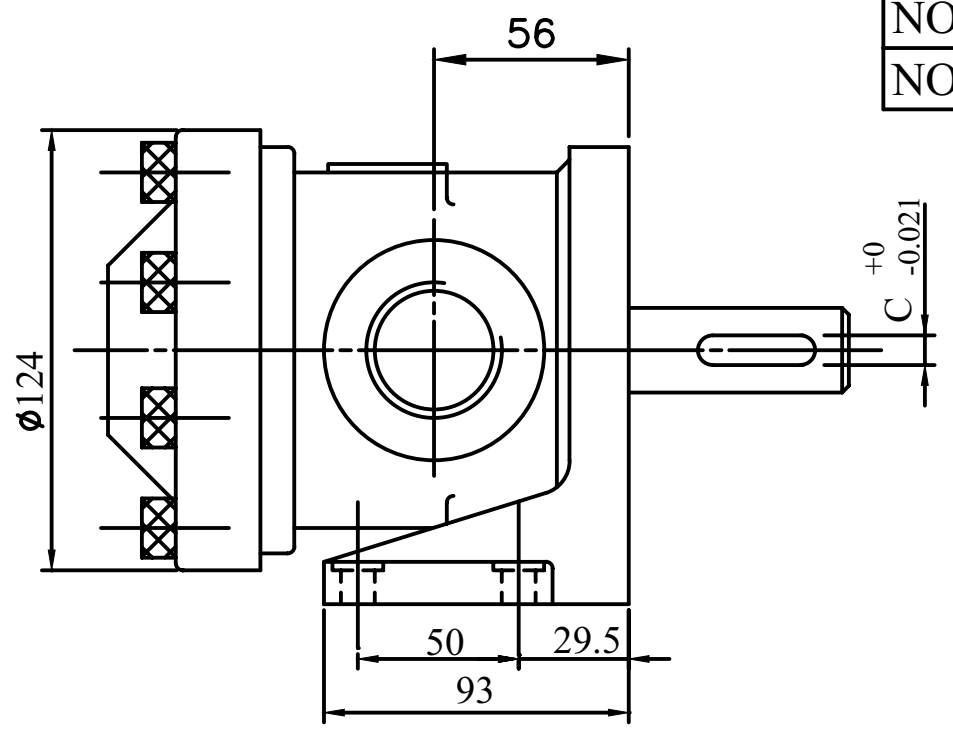

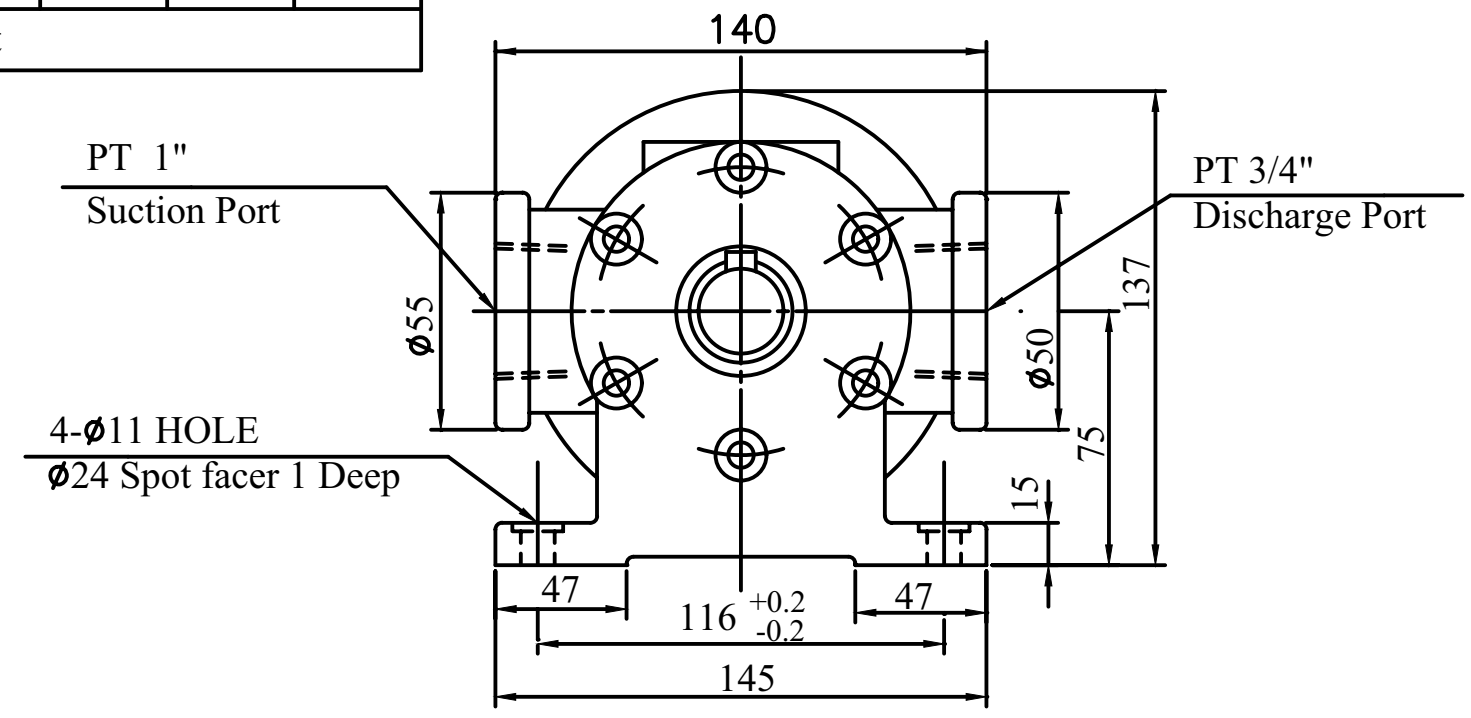

50T (Flange Type)法蘭型

	A	B	C	D	E	F
NO.01-Shaft	Ø19.05	36.0	4.76	21.3	32	Ø95.02
NO.02-Shaft	Ø22.0	46.0	5.0	24.0	30.0	Ø96.02
NO.04-Shaft	Splined Shaft					

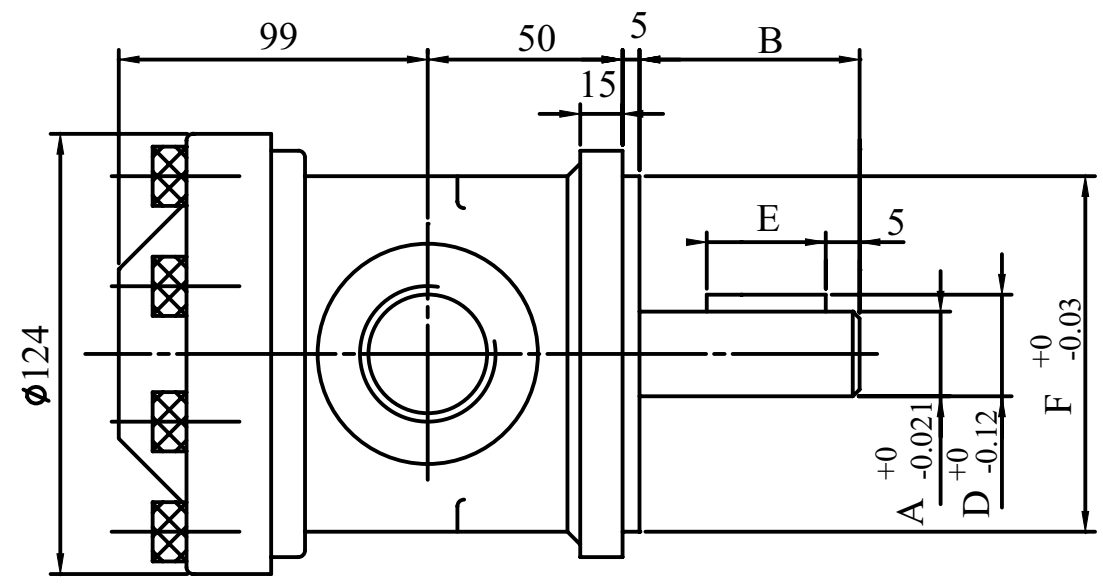

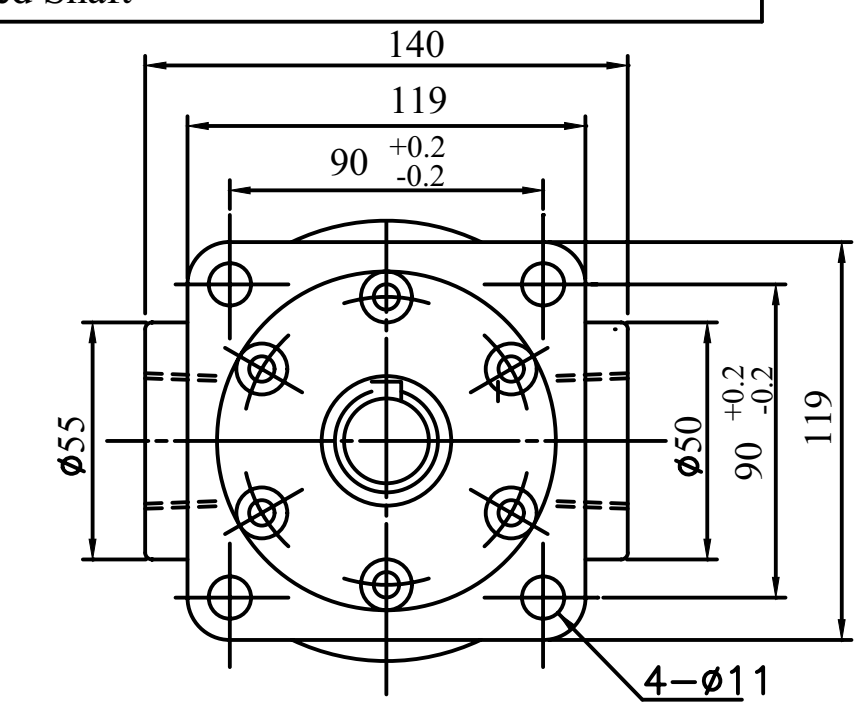



Shaft NO:04
CP. 1.633
Pressure Angle 45°
30 Teeth

150T (Foot Type)腳座型

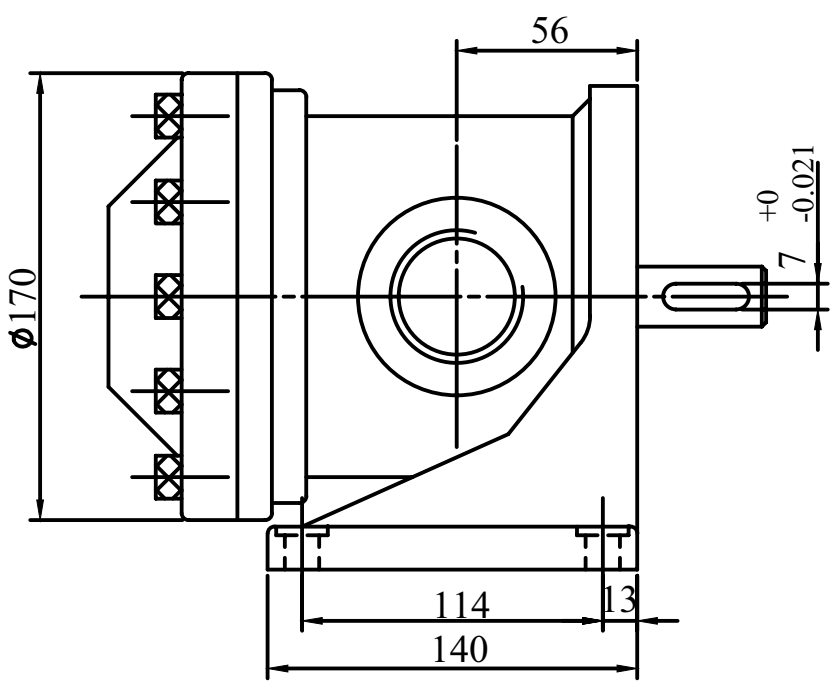

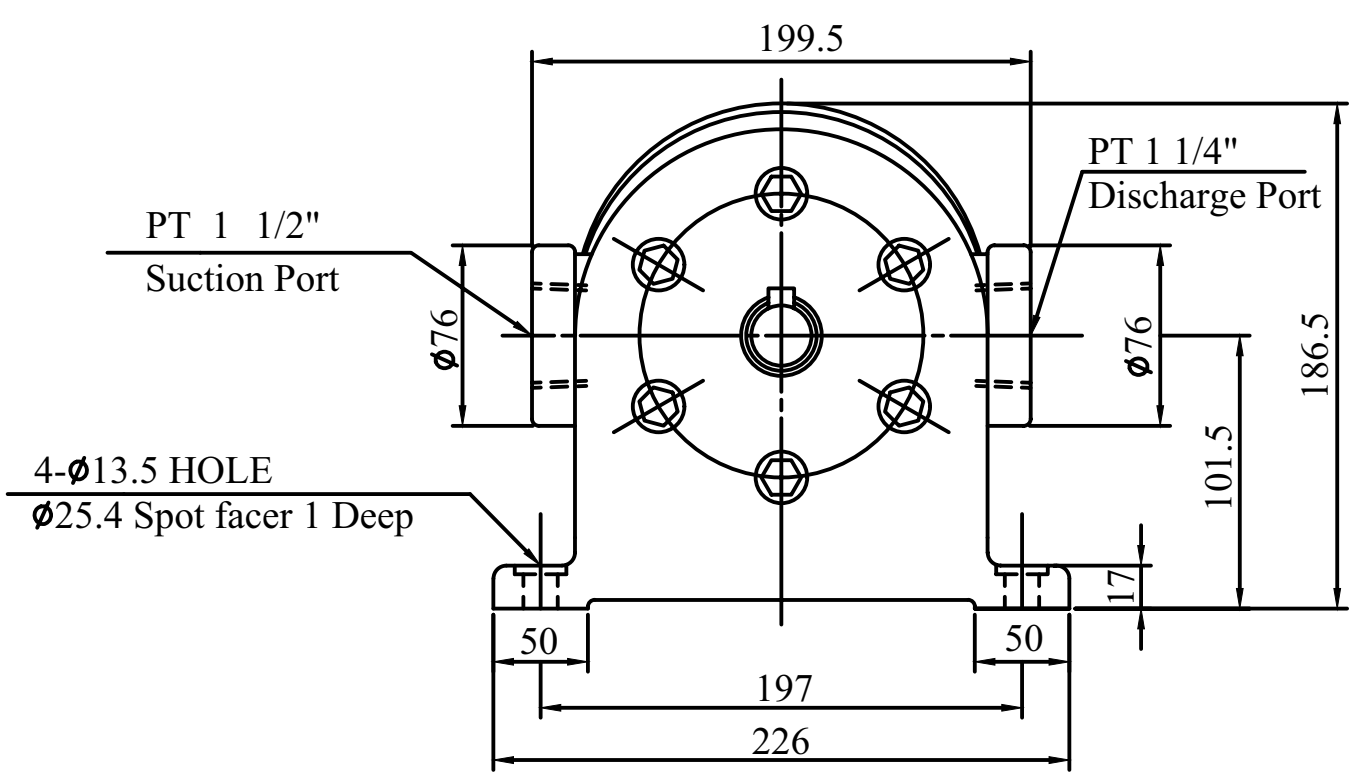

150T (Flange Type)法蘭型

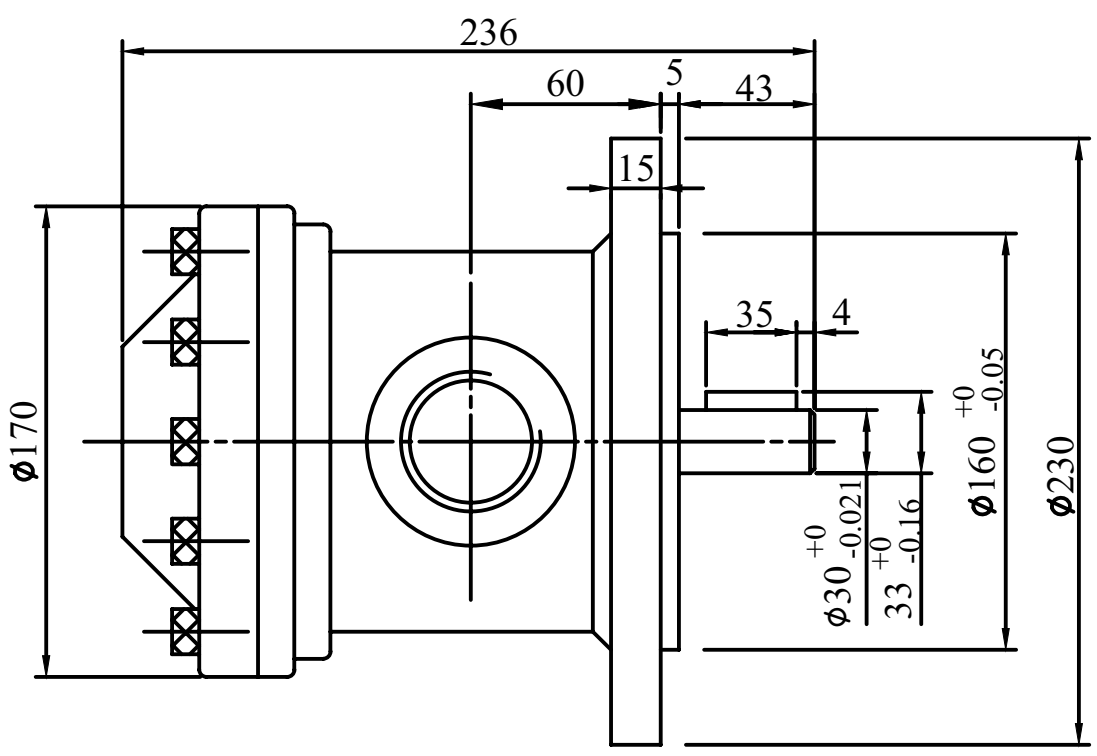

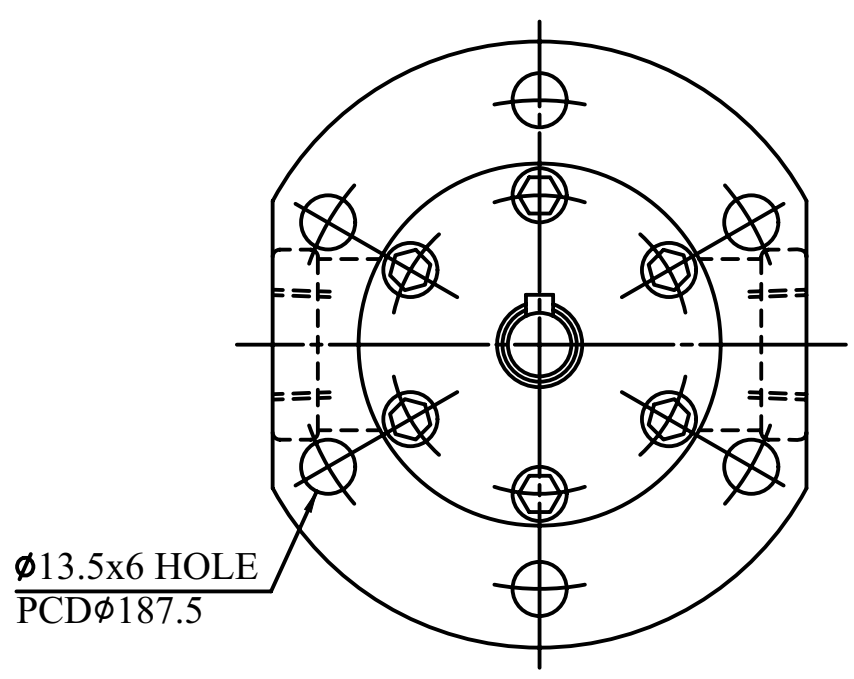

50T+PA
150T+PA

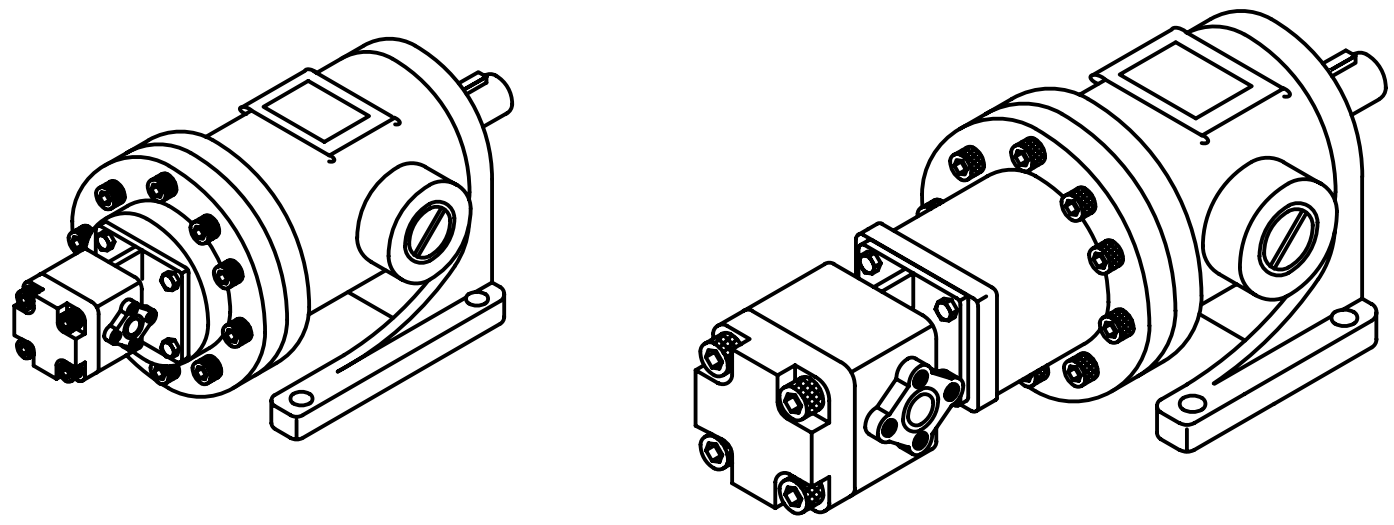

ORDERING CODE 訂購指引

50 T - 36 - L R R - G - PA5 - 01

①50 ②T ③36 ④L ⑤R ⑥R ⑦PA5 ⑧01

① Series Number(型號)
50T-
150T-

② Piping Mounting(管口形式)
T: Piping Type(管徑牙口) F: Flange Type(法蘭型)

③ Capacity Mark: (c.c/rev)(流量)
50T:09,12,14,17,19,21,23,26,30,36,40
150T:48,61,75,94,116,125

④ Flange Type
L: Foot Type(腳座型) F: Flange Type(法蘭型)

⑤ Shaft Rotation(心軸轉向)
(Viewed From Shaft End)
R: Clockwise (順時針) L: Anti-Clockwise(反時針)

⑥ Discharge Port Position(出口位置)
(Viewed From Shaft End)
R: On Right Hand(右) L:On Left Hand (normal)(左)

⑦ (銜接型號)

Model	Capacity
PA1	1.07
PA2	2.02
PA3	3.01
PA4	4.01
PA5	6.05

High-Pressure
Gear Pump
(Cover End)
(c.c/rev)

⑧ Shaft Type(心軸種類) 01: No.01 Shaft
02: No.02 Shaft

50T+VQ15 (Foot Type)腳座型

	A	B	C	D	E
NO.01-Shaft	ø19.05	36.0	4.76	21.3	32
NO.02-Shaft	ø22.0	46.0	5.0	24.0	30.0
NO.04-Shaft	Splined Shaft				

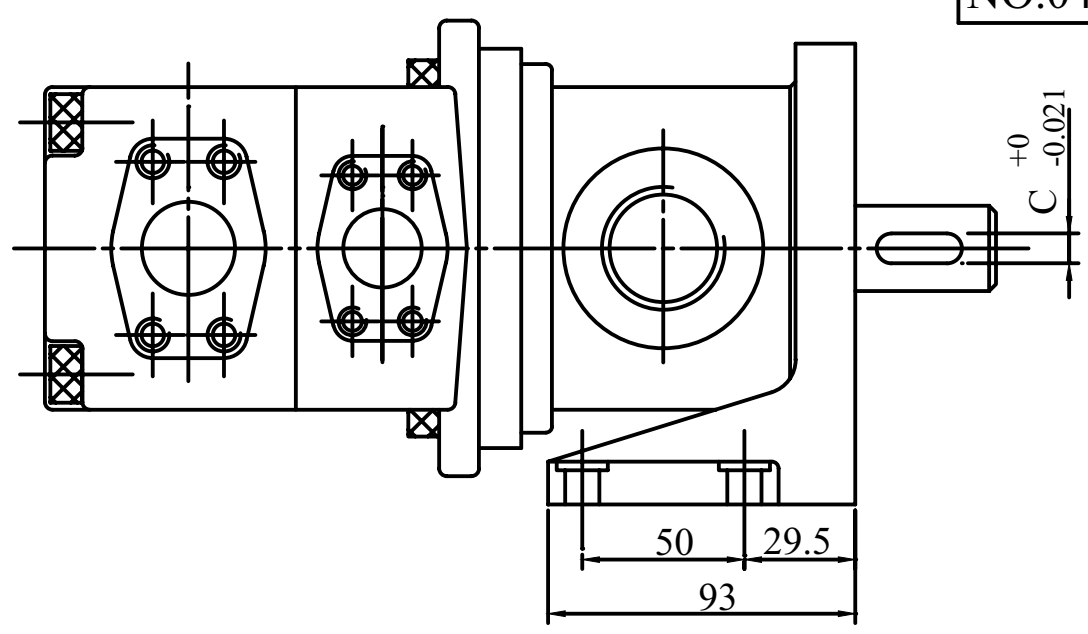

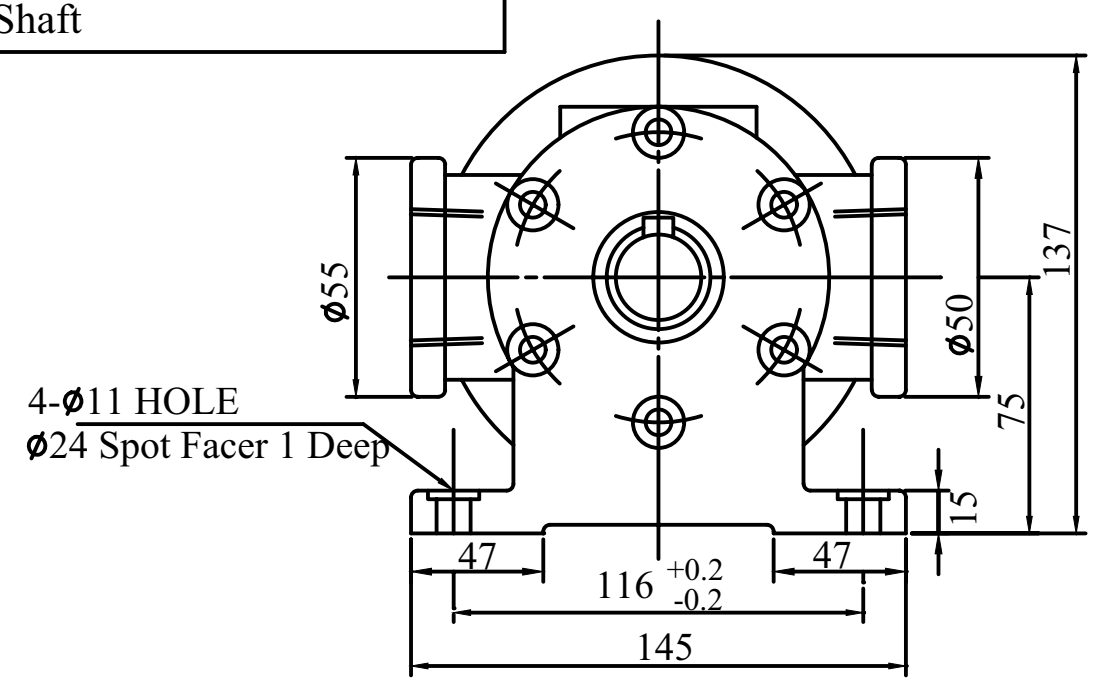

50T+VQ15 (Flange Type)法蘭型

	A	B	C	D	E	F
NO.01-Shaft	ø19.05	36.0	4.76	21.3	32	ø95.02
NO.02-Shaft	ø22.0	46.0	5.0	24.0	30.0	ø96.02
NO.04-Shaft	Splined Shaft					

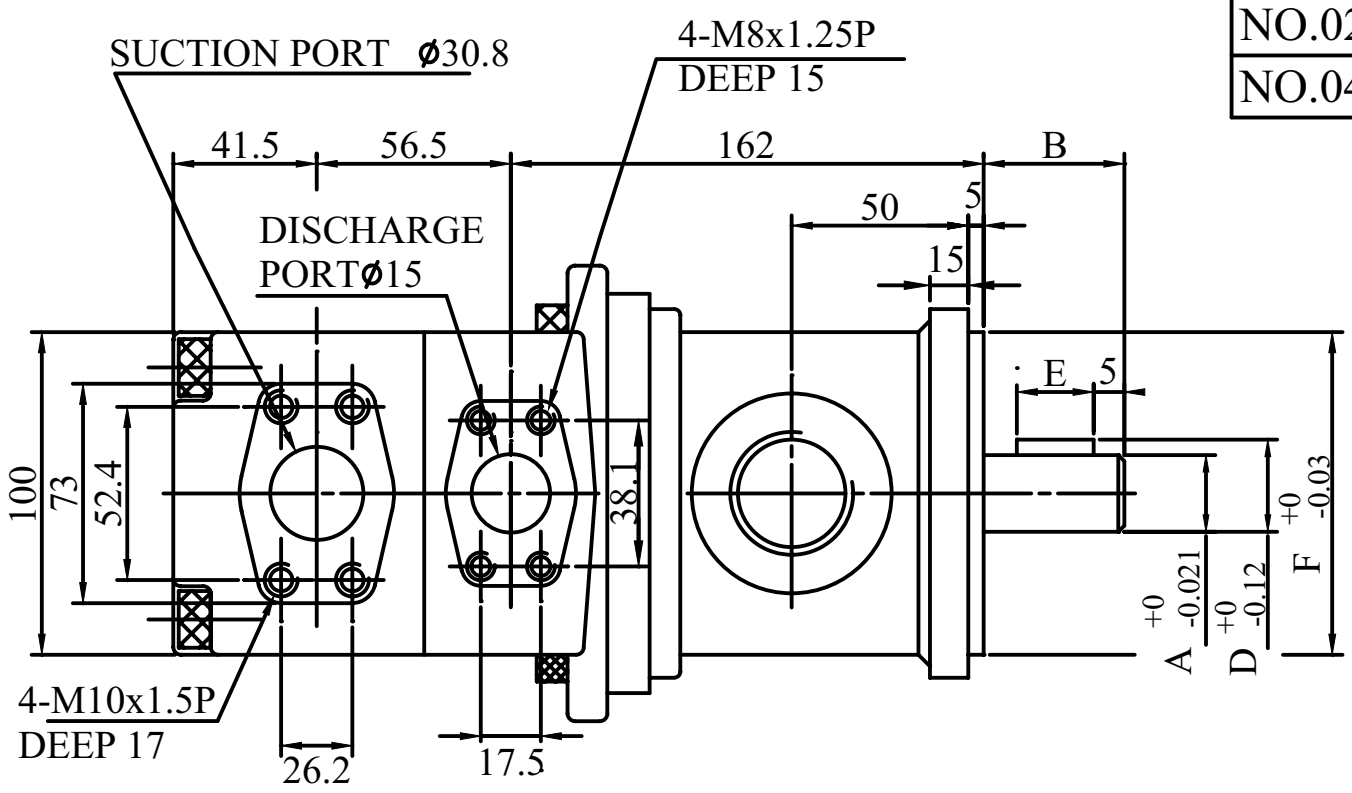

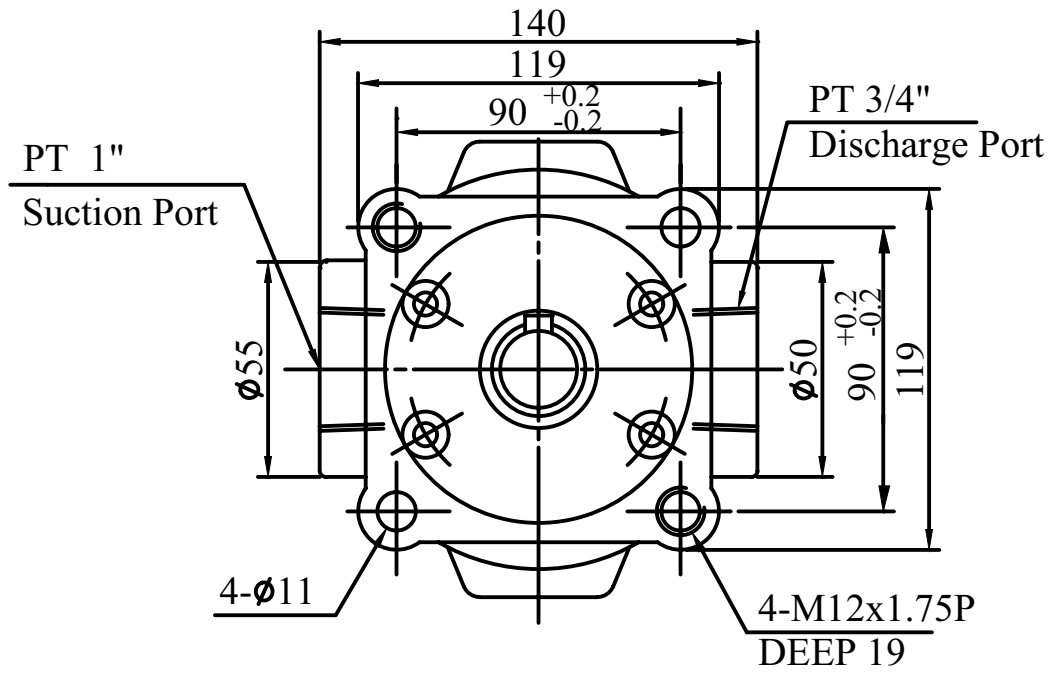



150T+VQ15 (Foot Type)腳座型

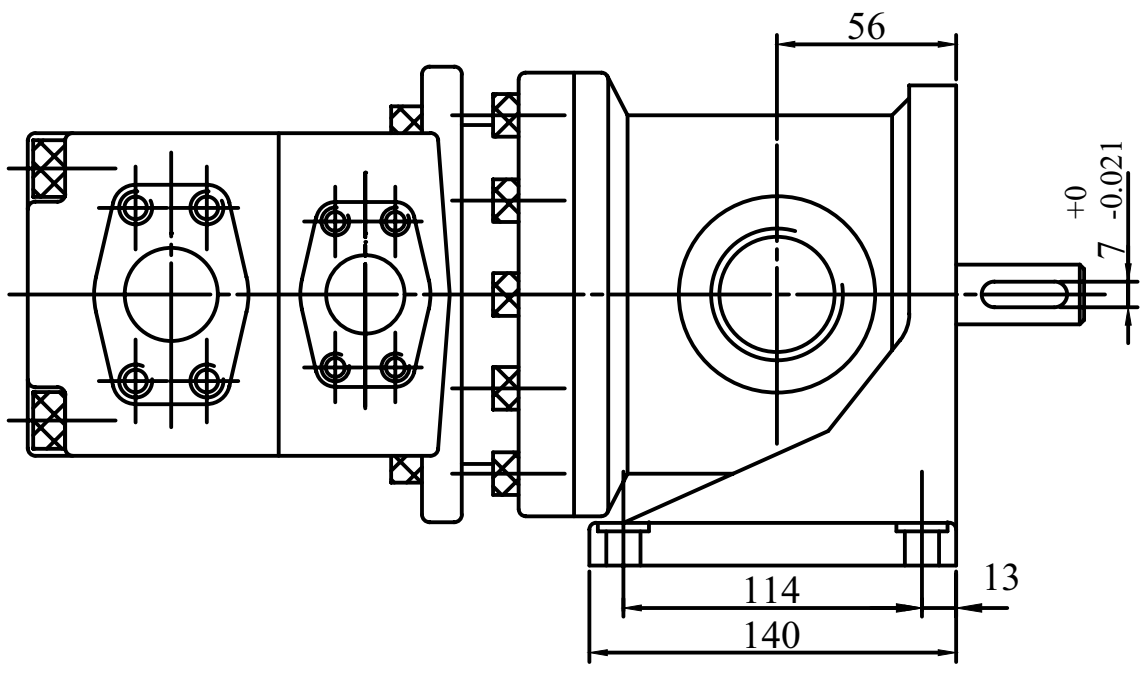

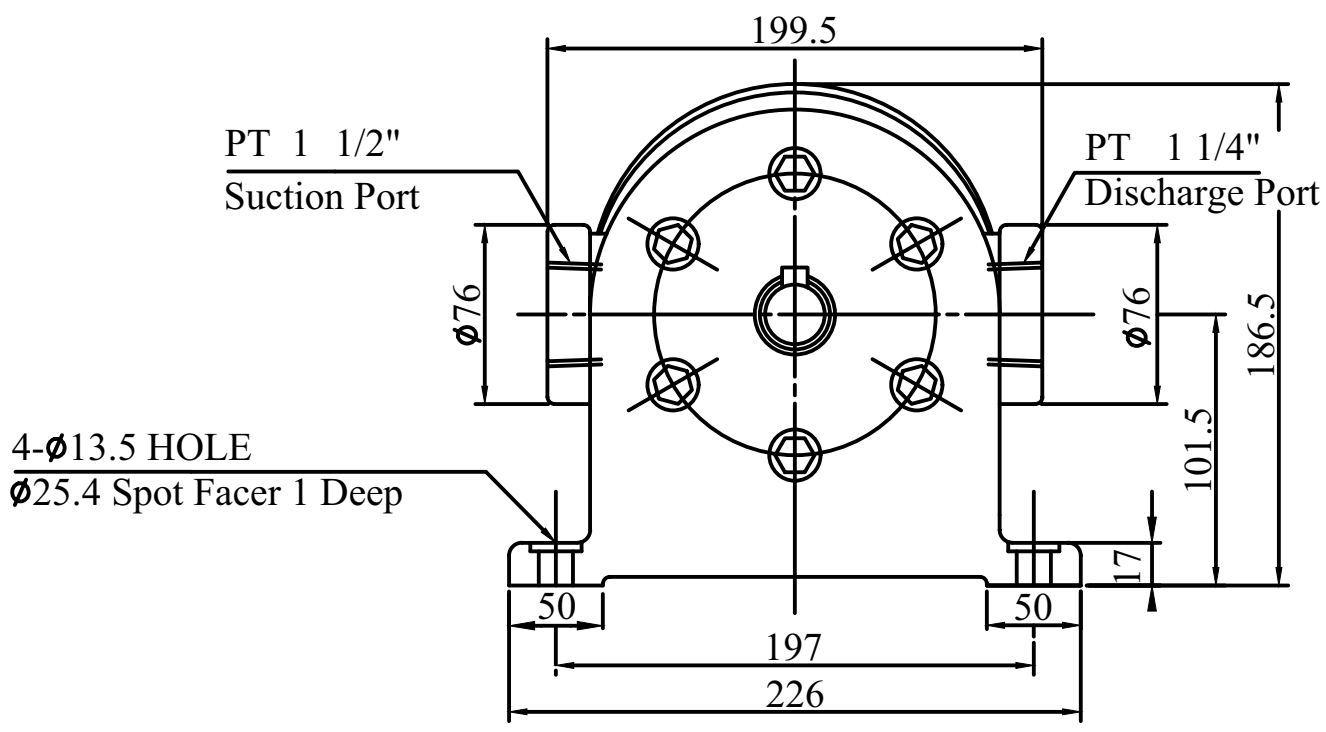

150T+VQ15 (Flange Type)法蘭型

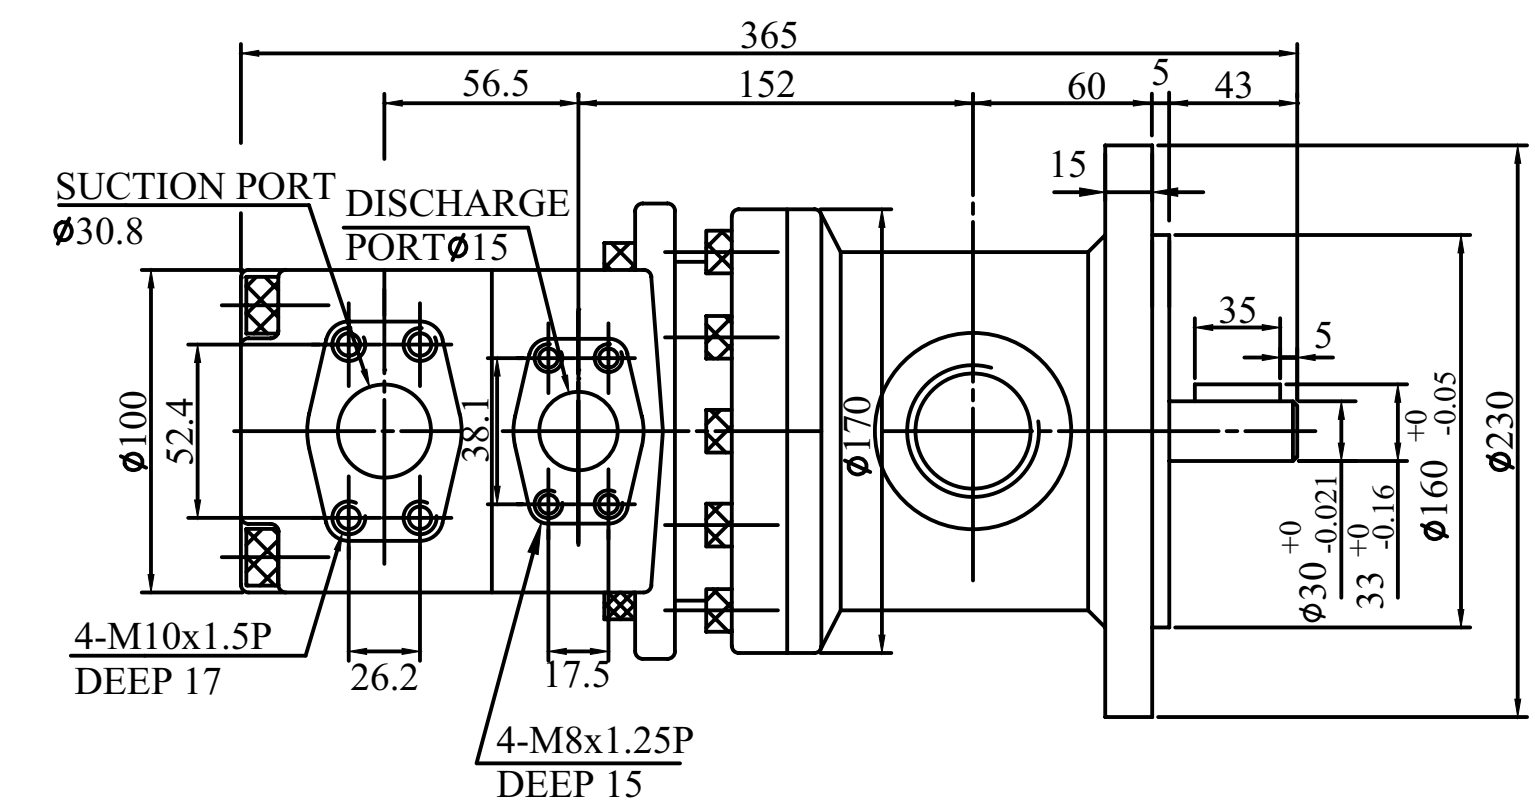

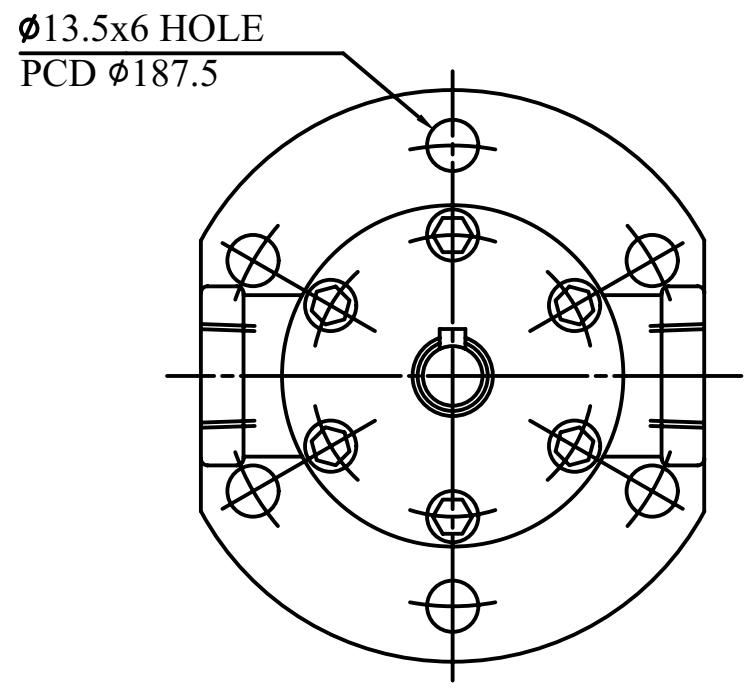

KCL

50T.150T+VQ15 Series Pump Ordering Code
50T & 150T + VQ15系列雙泵訂購指引

50T+VQ15
150T+VQ15



ORDERING CODE 訂購指引

50 T - 36 - L R R - V1 - 17 - 01
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

①—— Series Number(型號)
50T-
150T-

②—— Piping Mounting(管口形式)
T: Piping Type(管徑牙口) F: Flange Type(法蘭型)

③—— Capacity Mark: (c.c/rev)(流量)
50T:09,12,14,17,19,21,23,26,30,36,40
150T:48,61,75,94,116,125

④—— Flange Type(安裝方式)
L: Foot Type(腳座型) F: Flange Type(法蘭型)

⑤—— Shaft Rotation(心軸轉向)
(Viewed From Shaft End)
R: Clockwise (順時針) L: Anti-Clockwise(反時針)

⑥—— Discharge Port Position(出口位置)
(Viewed From Shaft End)
R: On Right Hand(右) L:On Left Hand (normal)(左)

⑦—— Hi - pressure Fixed Vane Pump(Cover End)(銜接型號)
V1:VQ15 Series

⑧—— Hi pressure Fixed Vane Pump (Cover End)(銜接流量)
Capacity Mark (c.c/rev)
6, 8, 11, 14, 17, 19, 23, 26, 31

⑨—— Shaft Type(心軸種類) 01:No.01 Shaft
02:No.02 Shaft

50T+PA (Foot Type)腳座型

	A	B	C	D	E
NO.01-Shaft	ø19.05	36.0	4.76	21.3	32
NO.02-Shaft	ø22.0	46.0	5.0	24.0	30.0

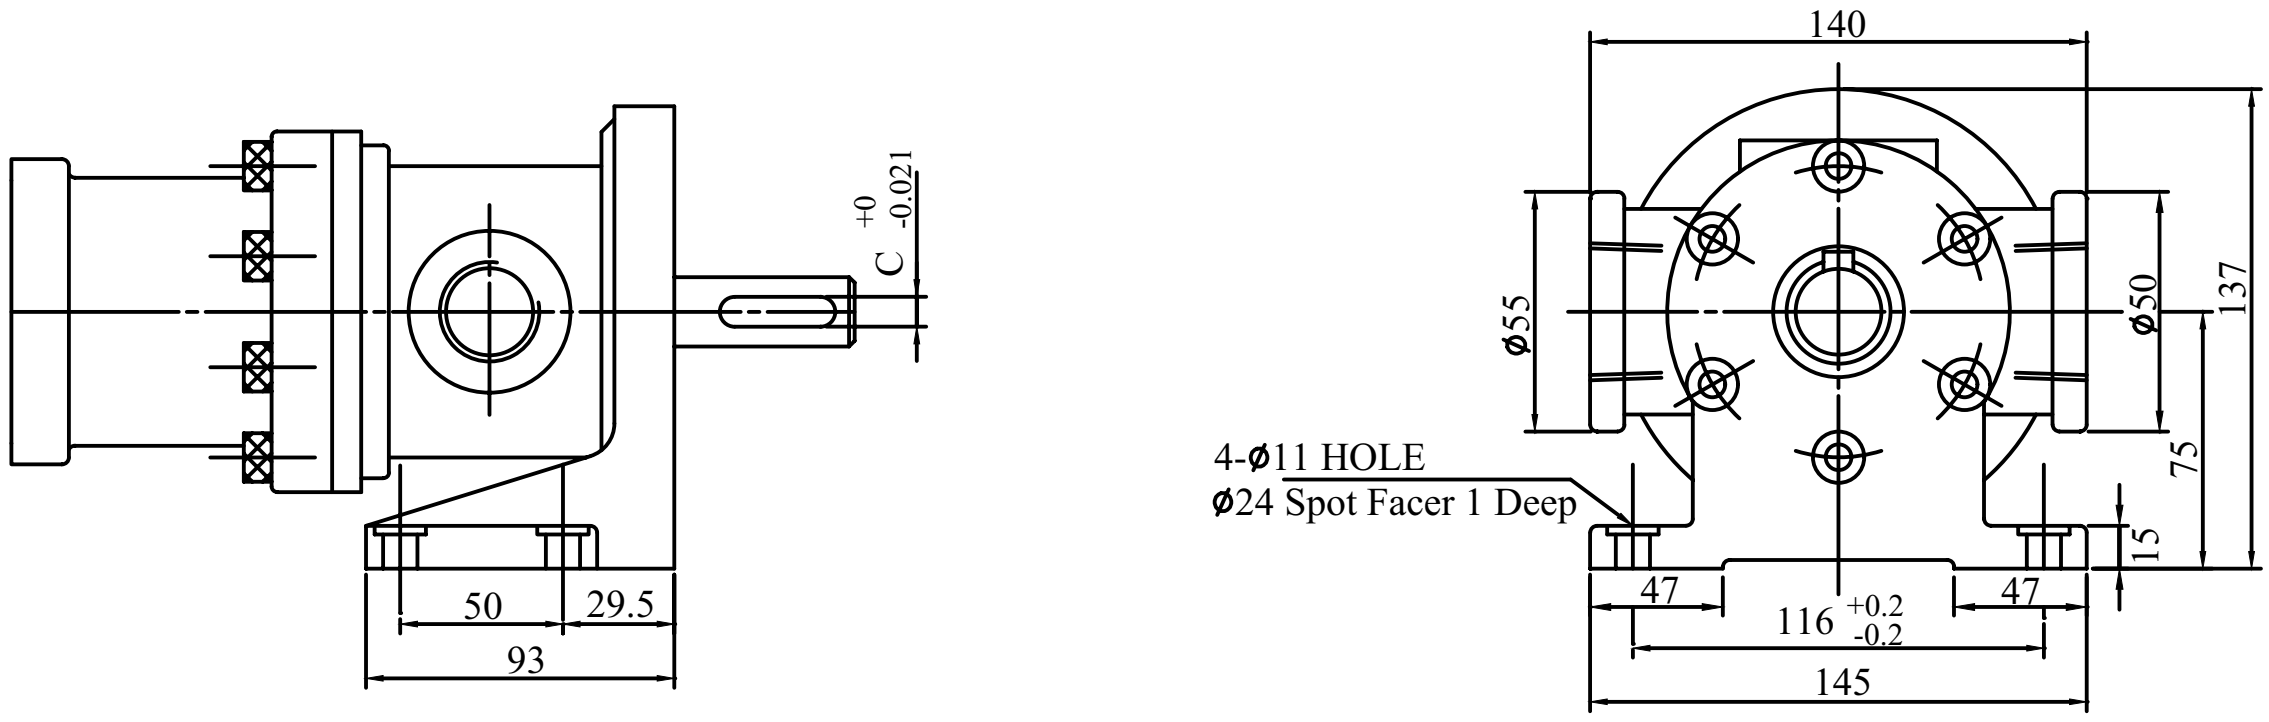

50T+PA (Flange Type)法蘭型

	A	B	C	D	E	F
NO.01-Shaft	ø19.05	36.0	4.76	21.3	32	ø95.02
NO.02-Shaft	ø22.0	46.0	5.0	24.0	30.0	ø96.02

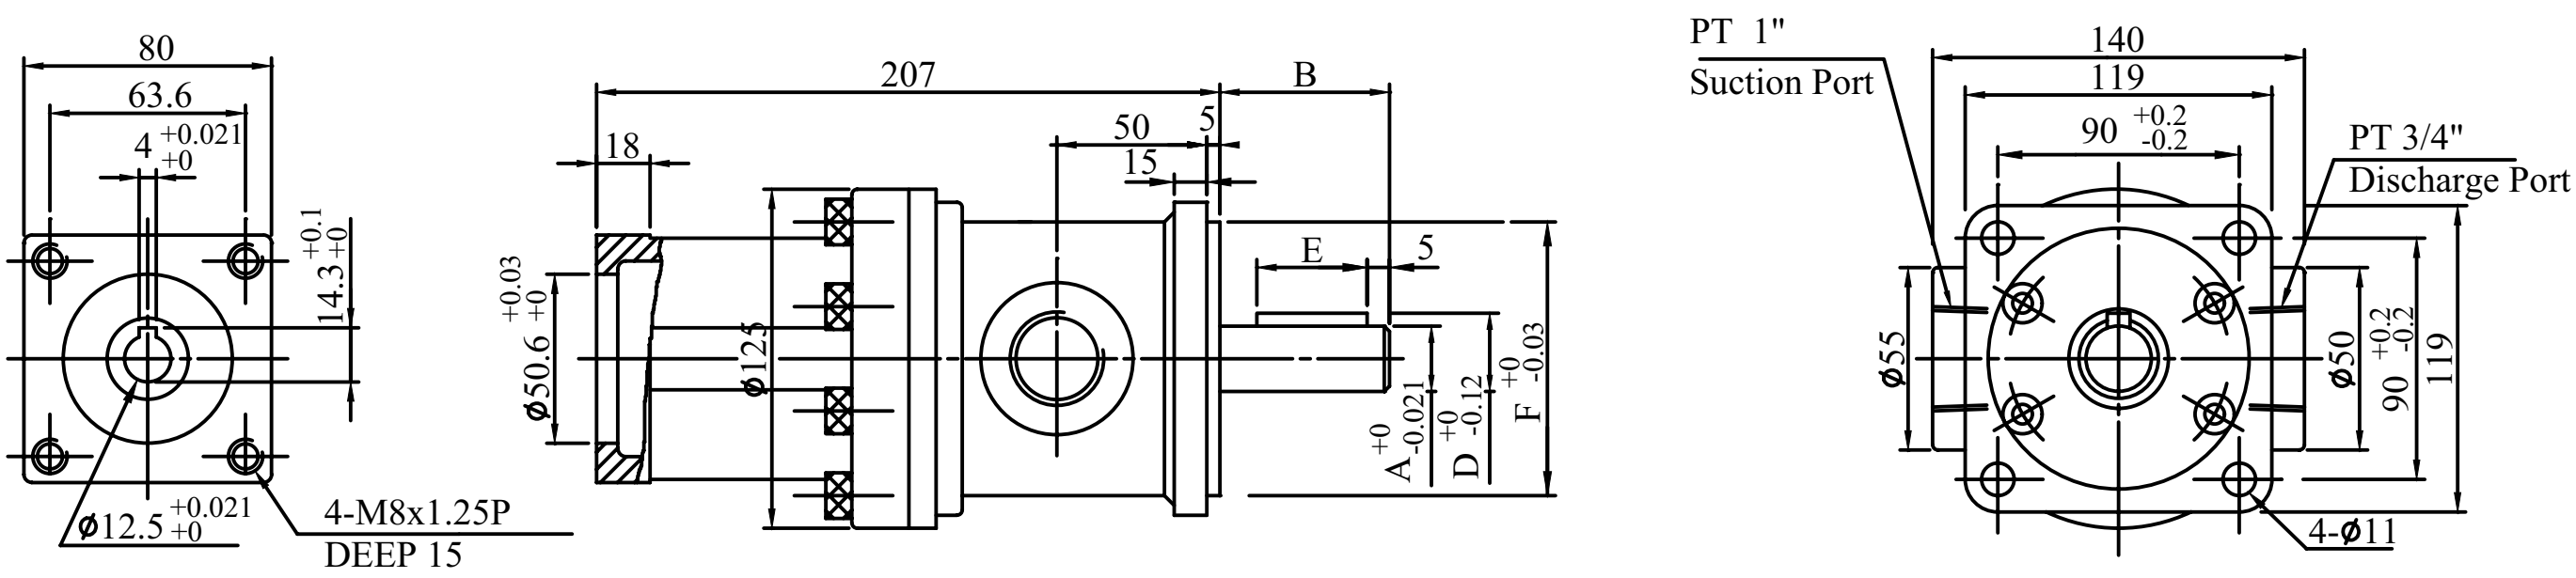

150T+PA (Foot Type)腳座型

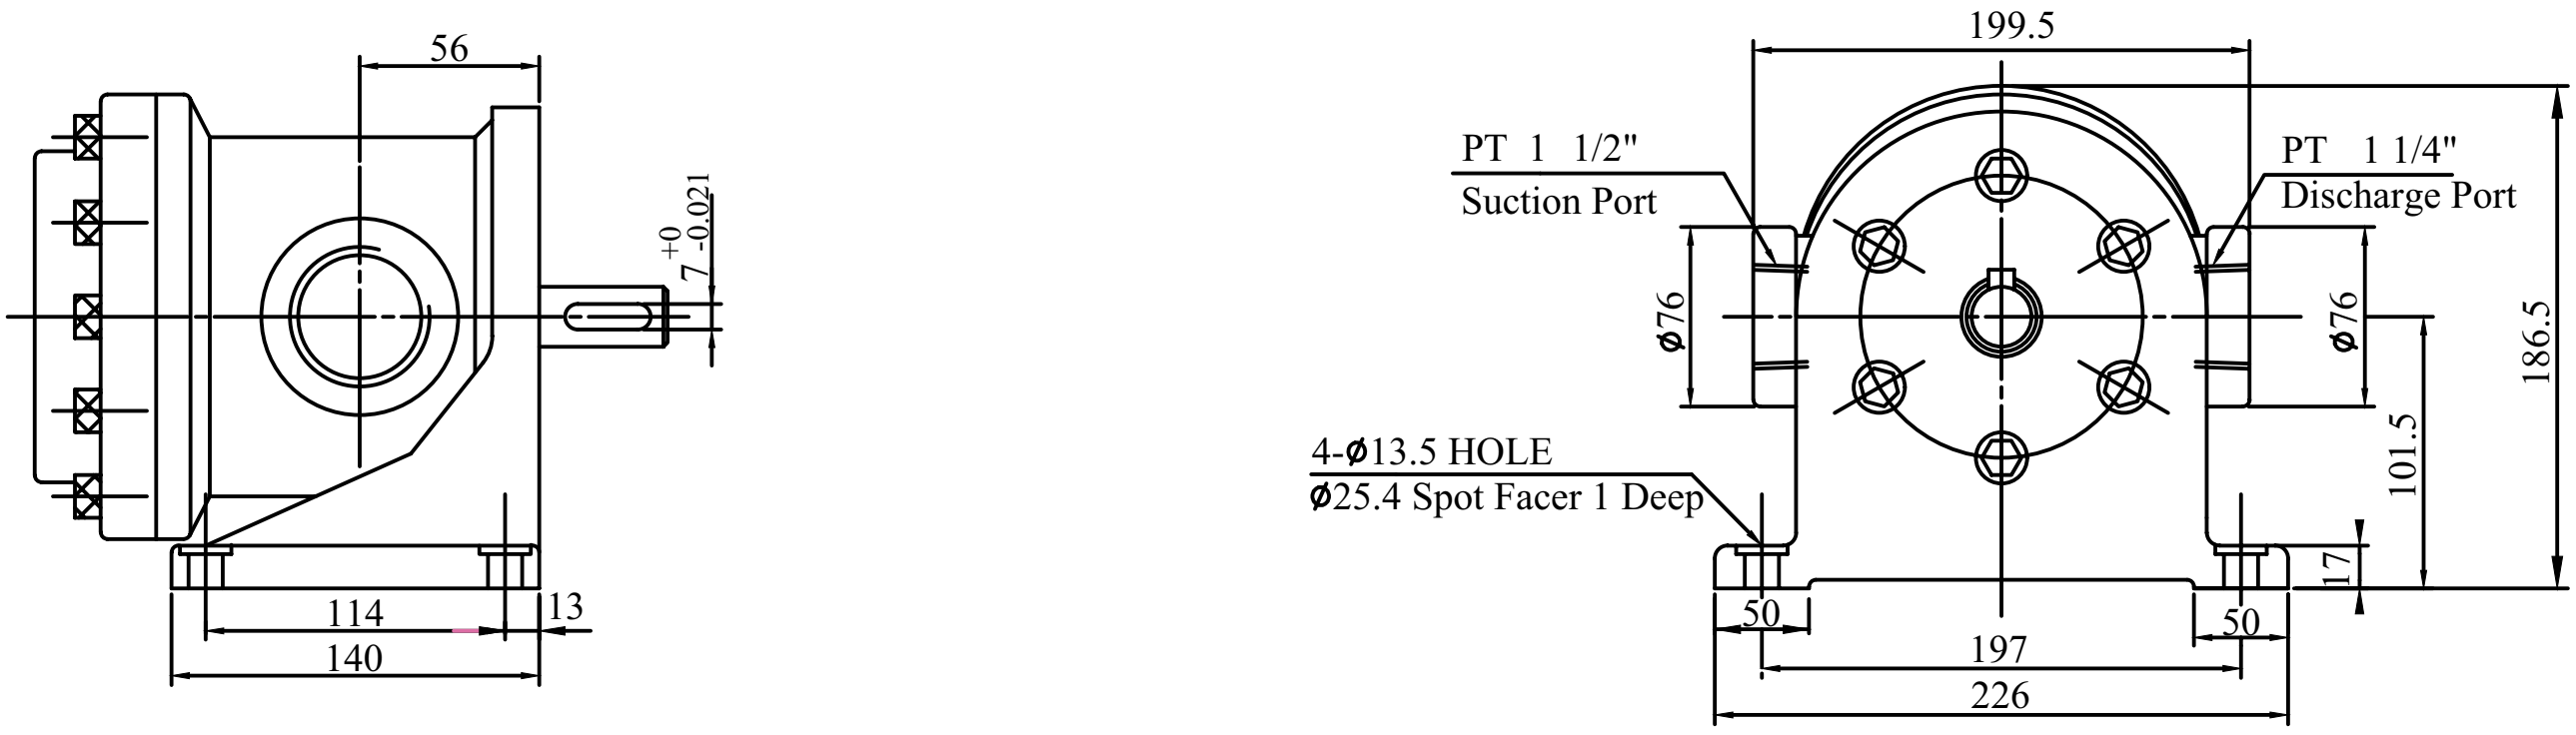

150T+PA (Flange Type)法蘭型

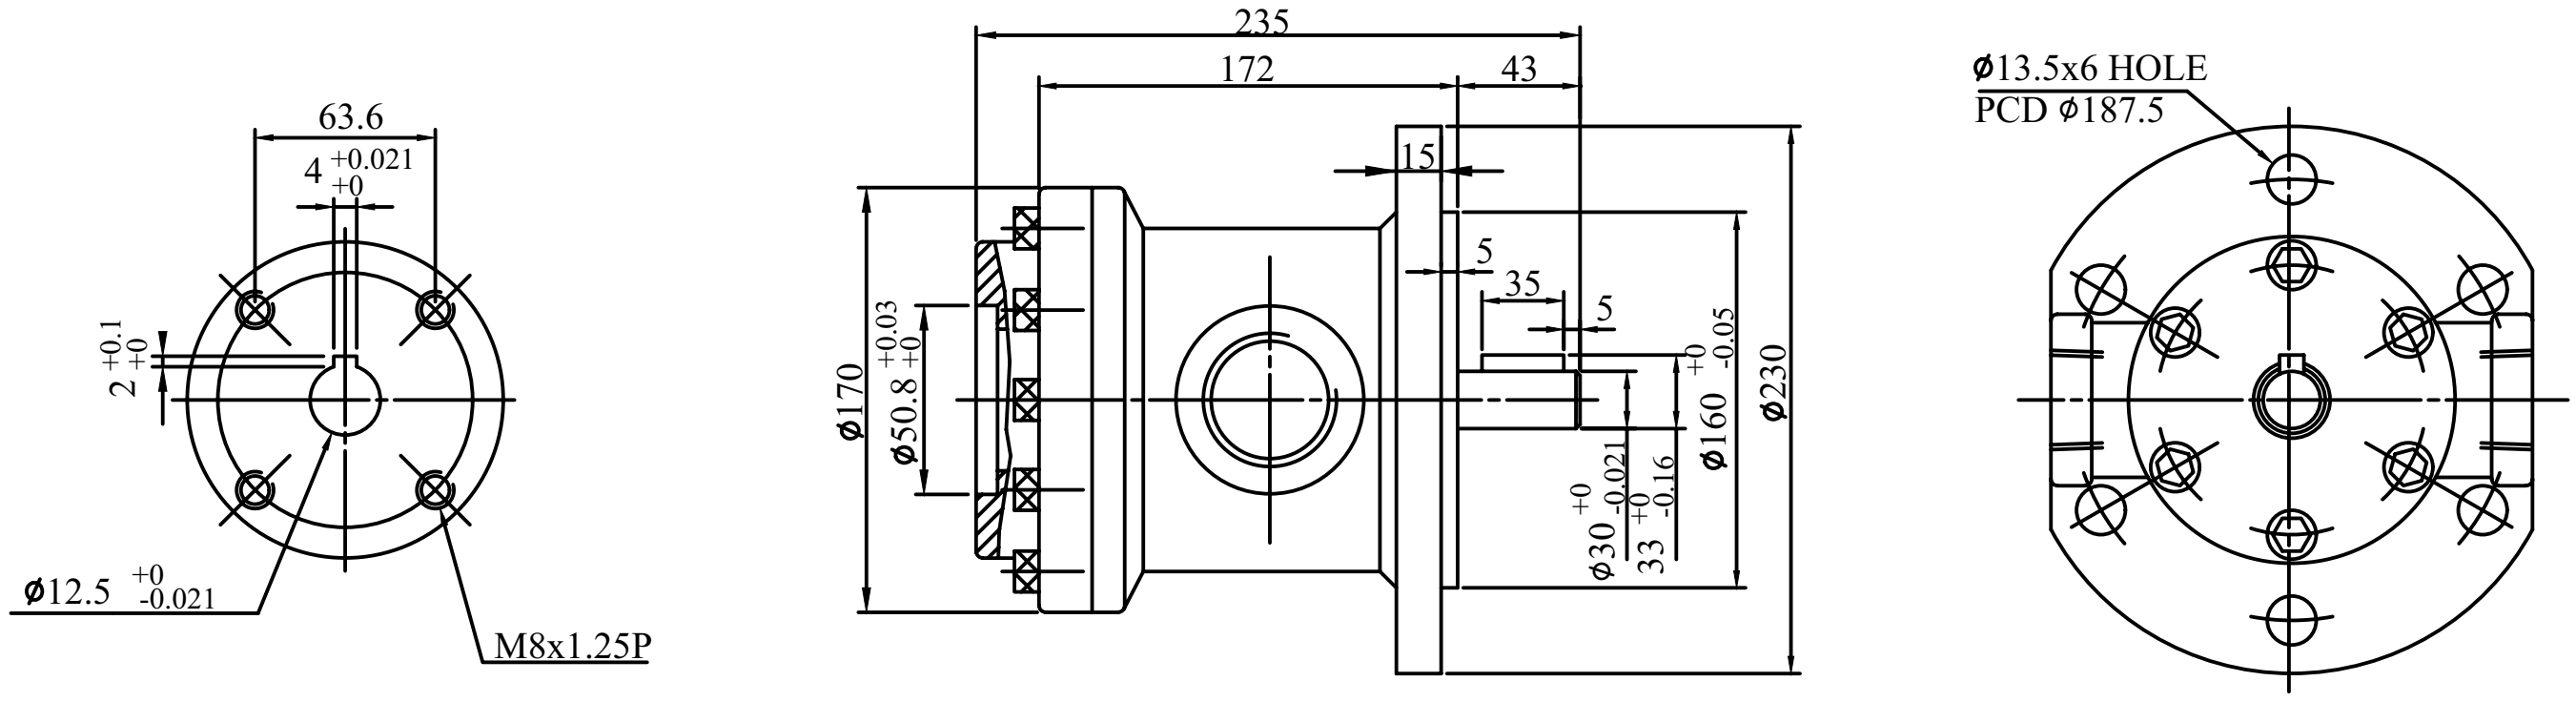

KCL

50T&150T +TSP Series Pump Dimensional Drawing
50T & 150T+TSP系列泵外型尺寸圖

50T+TSP (Foot Type)腳座型

	A	B	C	D	E
NO.01-Shaft	⌀19.05	36.0	4.76	21.3	32
NO.02-Shaft	⌀22.0	46.0	5.0	24.0	30.0

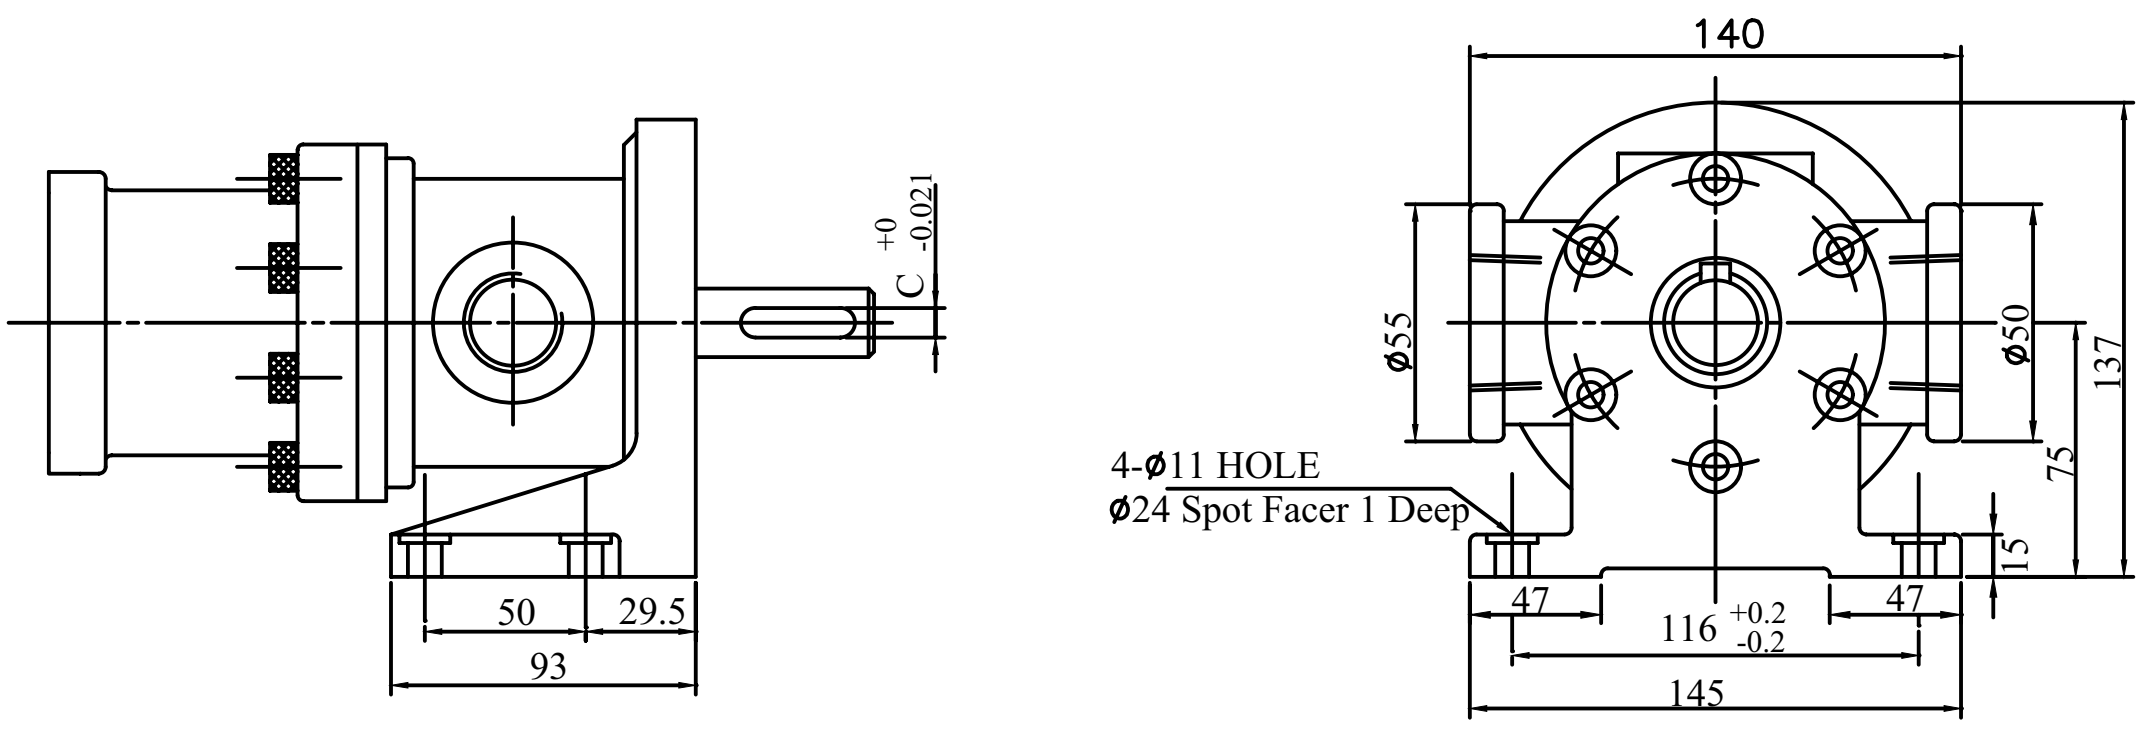

50T+TSP (Flange Type)法蘭型

	A	B	C	D	E	F
NO.01-Shaft	⌀19.05	36.0	4.76	21.3	32	⌀95.02
NO.02-Shaft	⌀22.0	46.0	5.0	24.0	30.0	⌀96.02

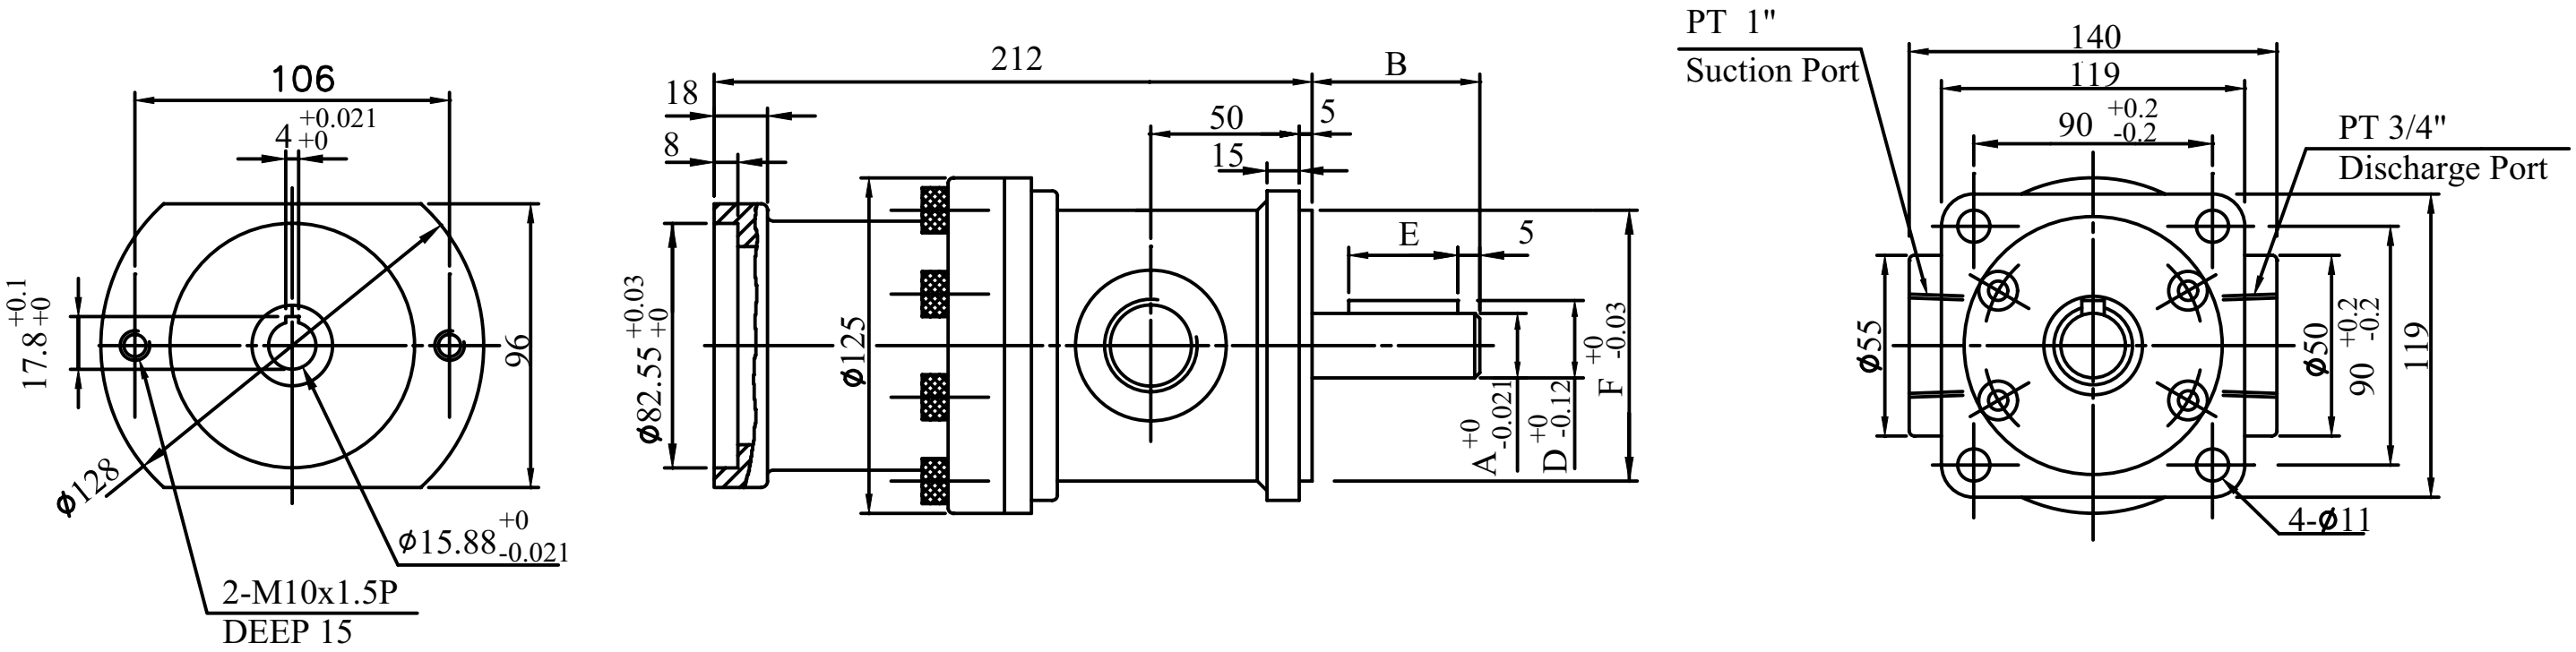

150T+TSP (Foot Type)腳座型

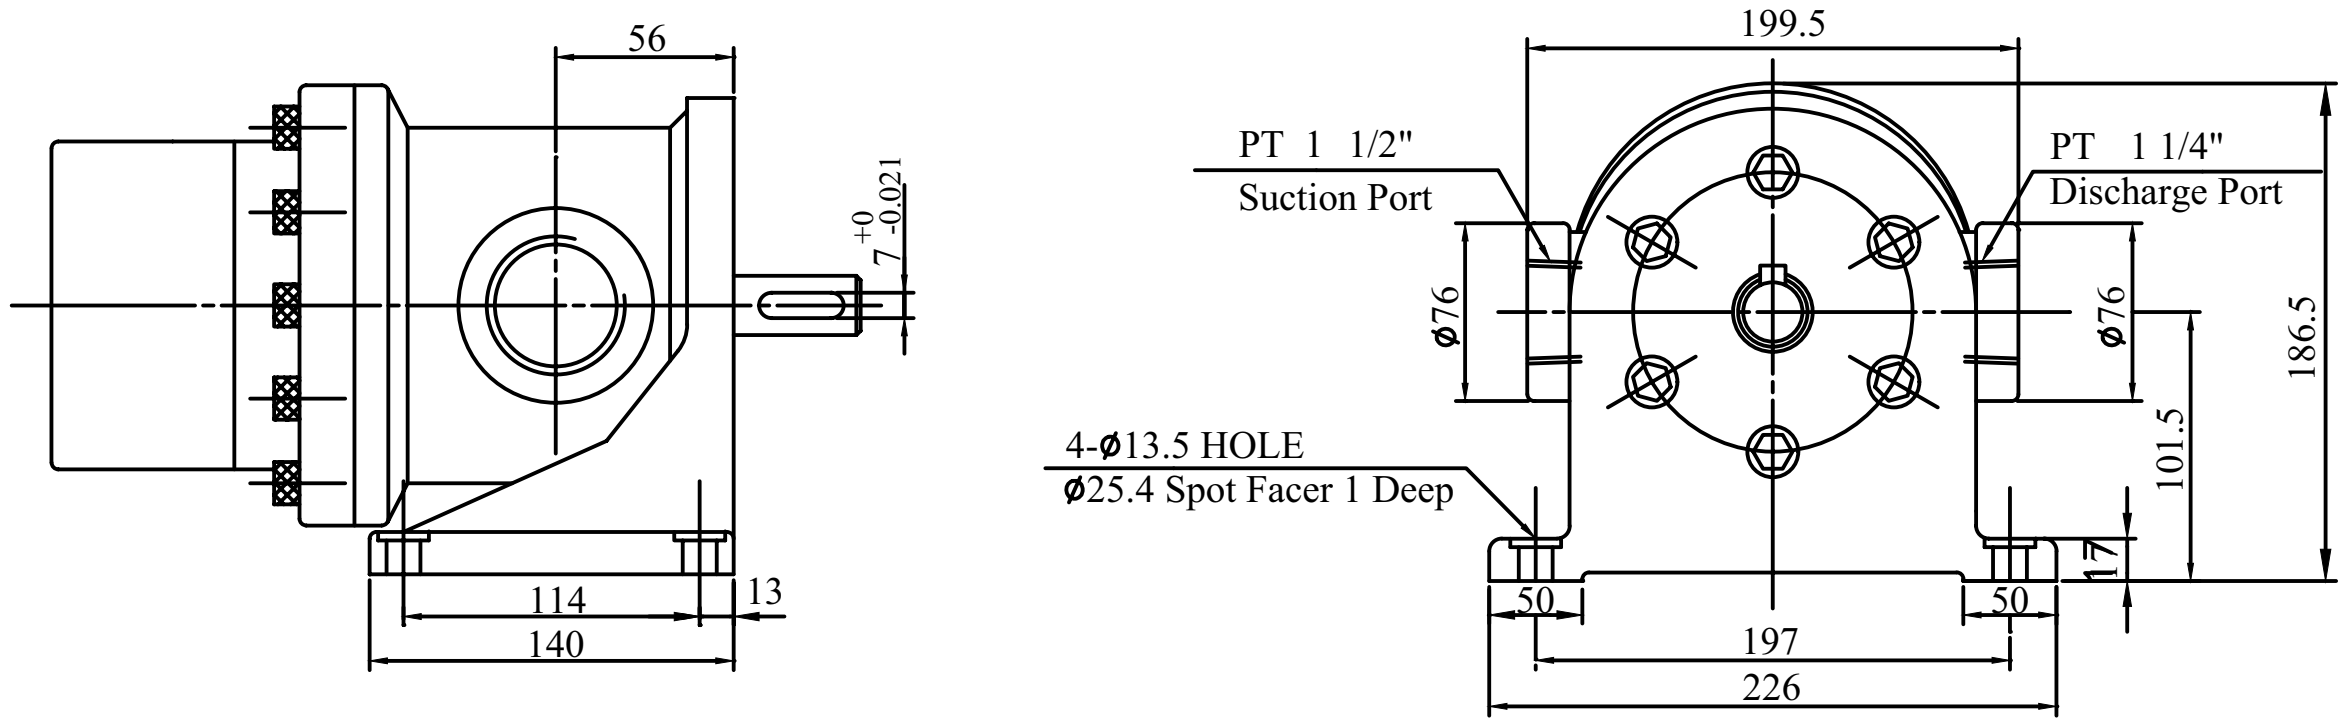

150T+TSP (Flange Type)法蘭型